

FIR15N SELF PROPELLED WORK PLATFORM





15.60m (51ft) Working height

9.60m (31ft 6in) Working Outreach

1.50m Narrow Chassis

Allows operation in confined areas

Bi-Energy Power Available Optimising utilisation

225kg SWL Extra capacity for tools and materials

Telescopic Upper Boom

Greater accuracy when positioning platform

Platform Rotation & Flyboom

Improving manoeuvrability on site











The Nifty **Height Rider 15N** offers one of the best working envelopes in it's class. Designed using the latest computer technology, it delivers unrivalled working outreach combined with pinpoint accuracy when positing the platform. A super narrow base as standard with the option of Bi-Energy power makes it ideal for a wide range of applications.

100°

SAFETY FEATURES

- Manual Recovery with Hand Pump
- Automatic Failsafe Brakes
- CE Mark
- Tilt Alarm
- Solid Tyres
- Dual Harness Points
- Dual Controls (platform & base)
- Lock Valves on all Hydraulic Cylinders

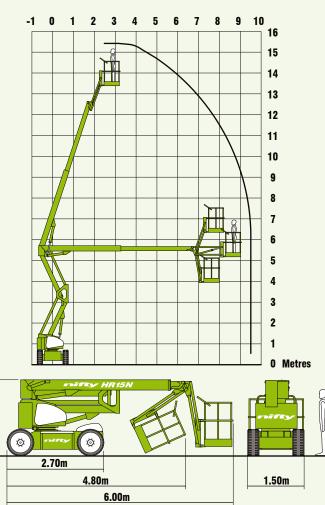



Supplied by:

2.10m



With more outreach than any other machine in its class and a base width of only 1.50m, the **HR15N** in one of the most effective and versatile self propelled

platforms available.

SPECIFICATIONS

Working Height	15.60m	51ft 2in
Platform Height	13.60m	44ft 7in
Working Outreach	9.60m	31ft 6in
Slew	360°	
Flyboom Arc	150 [°]	
Width	1.50m	4ft 11in
Height	2.10m	6ft 11in
Length - Stowed	4.80m	15ft 9in
- Overall	6.00m	19ft 8in
Minimum Weight	6,400kg*	14,100lbs*
Turning Radius - Inside	1.21m	3ft 11in
- Outside	4.40m	14ft 5in
Platform Rotation	100 [°]	
Platform Capacity	225kg	500lbs
Platform Size	1.50m x 0.70m	4ft 11in x 2ft 4in
Drive Speed	4 kph	2.5 mph
Gradeability	25%	
Control System	Fully proportional electric over hydraulic	
Power System	Battery Only	
	LPG Only	
	Bi-Energy - Battery & Kubota 722 18Hp Diesel	

* Weights may vary according to specification, please confirm before ordering.

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT LTD Fingle Drive Stonebridge Milton Keynes MK13 0ER England www.niftylift.com e.mail: info@niftylift.com Tel.: +44 (0)1908 223456 Fax.: +44 (0)1908 312733

