

# **SELF PROPELLED** ACCESS PLATFORM



17.20m (56ft 6in) Working height

9.60m (31ft 6in) Working outreach

**45% Gradeability** 4WD for rough terrain

Suspension System Improved traction on uneven terrain

**2.00m Chassis Width** Operation in confined areas

Fully Proportional Hydraulic Controls Simple, reliable & easy to use

**1.80m Wide Platform** Improving operator comfort

Platform Rotation & Flyboom Improved access to applications






The Nifty Height Rider 17 will lift 2 men and tools to a working height of over 17m or an outreach of 9.6m. Fully proportional hydraulic controls make the **HR17** simple to use, reliable and easy to maintain, keeping running costs low and minimising downtime. Platform rotation and a 150° flyboom give greater control over positioning the platform making jobs both quicker and easier than before. Its weight saving and compact chassis give the HR17 excellent manoeuvrability on site and its powerful 4-Wheel Drive ensure that it can handle even the roughest terrain.

## **SAFETY FEATURES**

- Automatic Failsafe Brakes •
- Tilt Alarm
- Foam Filled Tyres
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- **Dual Harness Points**
- CE Marked

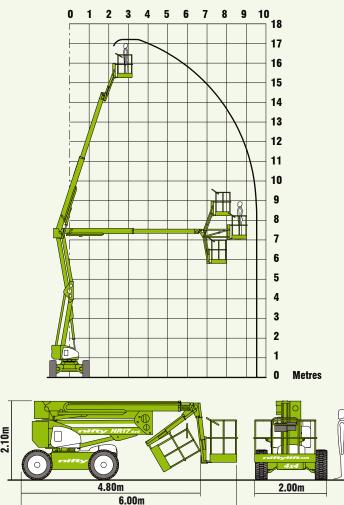





#### The Nifty HR17's unique suspension system ensures maximum traction when travelling over uneven ground and the 1.8m wide the allows operator ample space for tools.

### **SPECIFICATIONS**

Working Height	17.20m	56ft 6in
Platform Height	15.20m	49ft 10in
Working Outreach	9.60m	31ft 6in
Slew	360 <sup>°</sup>	
Flyboom Arc	150º	
Width	2.00m	6ft 7in
Height	2.10m	6ft 11in
Length - Stowed	4.80m	15ft 9in
- Overall	6.00m	19ft 8in
Minimum Weight	6,140kg*	13,508lbs*
Turning Radius - Inside	1.75m	5ft 9in
- Outside	4.22m	13ft 10in
Platform Rotation	1000	
Platform Capacity	225kg	
Platform Size	1.80m x 0.70m	5ft 11in x 2ft 4in
Drive Speed	6.6kph	4.1mph
Gradeability	45%	
Control System	Fully Proportional Hydraulic	
Power System	Kubota 1505 32Hp Diesel	
* Weights may vary according to specification in	esse confirm before ordering	

Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

#### Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



**NIFTYLIFTY LTD Fingle Drive** Stonebridge Milton Keynes **MK13 0ER** England www.niftylift.com e-mail: info@niftylift.com Tel.: +44 (0) 1908 223456 Fax.: +44 (0) 1908 312733